



Motorized Spindle mode

■ 225A

α 112M/20000iB

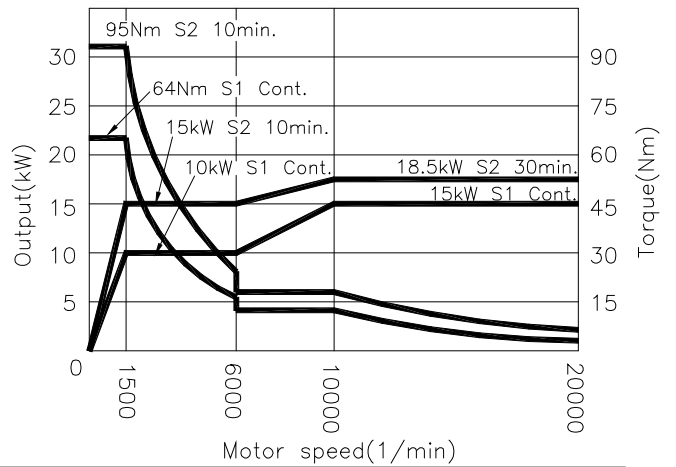

Tool interface	HSK A63 / BBT 40
Spindle Max. Speed	20,000rpm
Motor Power	15kW S1 cont. / 15kW S2 10min.
Motor Torque	64Nm S1 cont. / 95Nm S2 10min.
Bearing I.D.	Ø70 mm
Bearing lubrication	Oil-Air/Grease
Pull-in force	1800±100 kgf(HSK A63)/ 1000±100 kgf
Release pressure	Hydraulic - 45~60 bar
Cooling system	water with additive
Rotary union	C.T.S. Ready / 70bar
Encoder	FANUC Encoder
Weight	160Kg

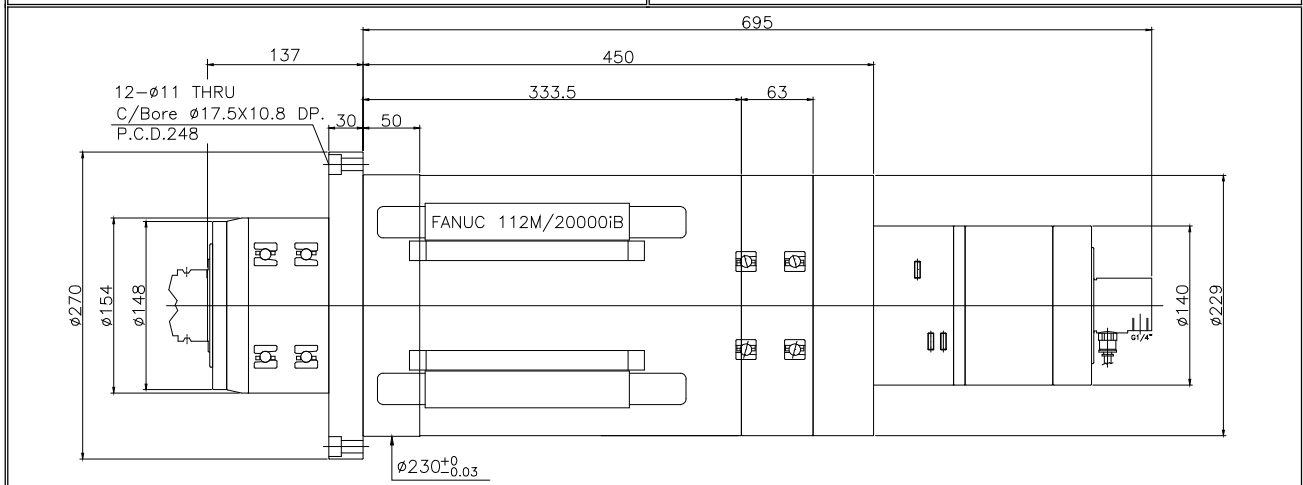

Edition 2016/11/01