



Motorized Spindle Spindle Model 246A

- BBT40 / 15,000rpm
- 22kW / 167Nm

Bi I 112L/15000

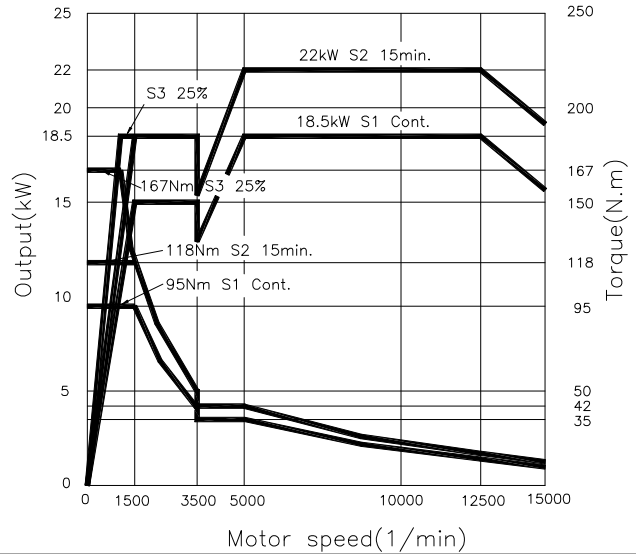

Tool interface	BBT40
Spindle Max. Speed	15000rpm
Motor Power	18.5kW S1 cont. / 18.5 kW S3 25%
Motor Torque	95Nm S1 cont. / 167Nm S3 25%
Bearing I.D.	Ø70 mm
Bearing lubrication	Grease
Pull-in force	850±100kgf
Release pressure	Hydraulic - 55~65bar
Cooling system	Oil
Rotary union	C.T.S. Ready / 70bar
Encoder	FANUC Encoder
Spindle Weight	147 kg

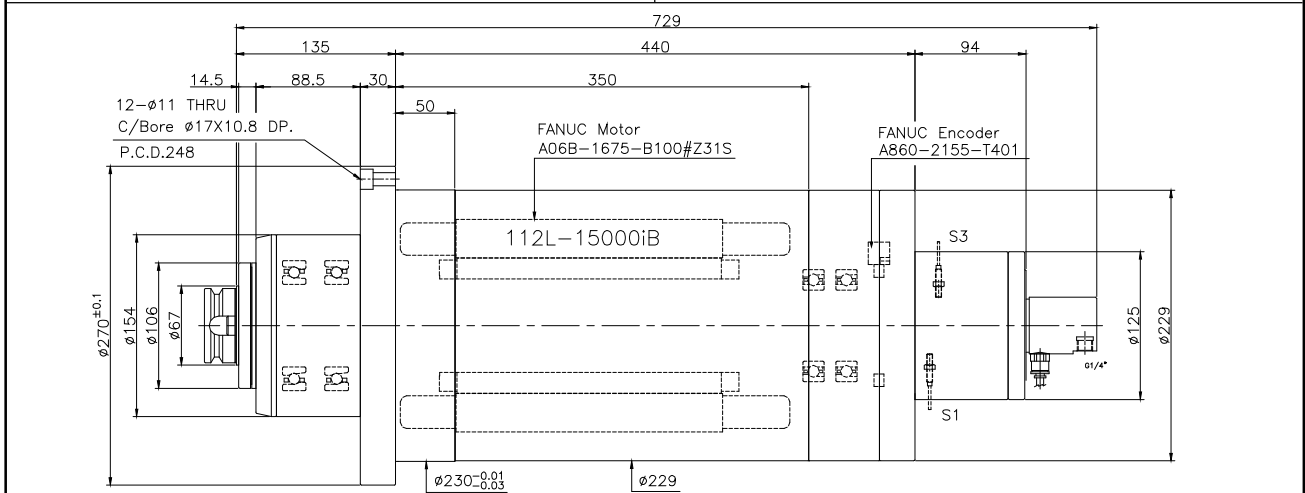

Edition 2016/06/01