



Motorized Spindle Spindle Model 255A

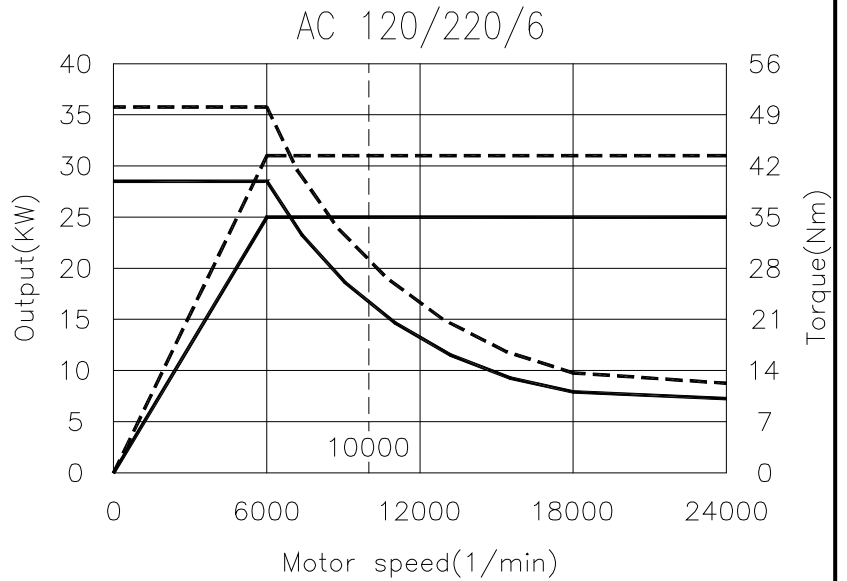

| | |
|---------------------|--|
| Tool interface | HSK A63 |
| Spindle Max. Speed | 24000rpm |
| Motor Power | 25kW S1 cont. / 31 kW S6 60%(ts = 2min) |
| Motor Torque | 40.1 Nm S1 cont. / 50.1 Nm S6 60%(ts = 2min) |
| Bearing I.D. | Ø70 mm |
| Bearing lubrication | Oil-Air |
| Pull-in force | 1800 kgf |
| Release pressure | Hydraulic - 45~60bar |
| Cooling system | Water+additives |
| Rotary union | C.T.S. Ready / 70bar |
| Encoder | sin/cos 1Vpp / 180 pulse/rev |
| Spindle Weight | 100Kg |

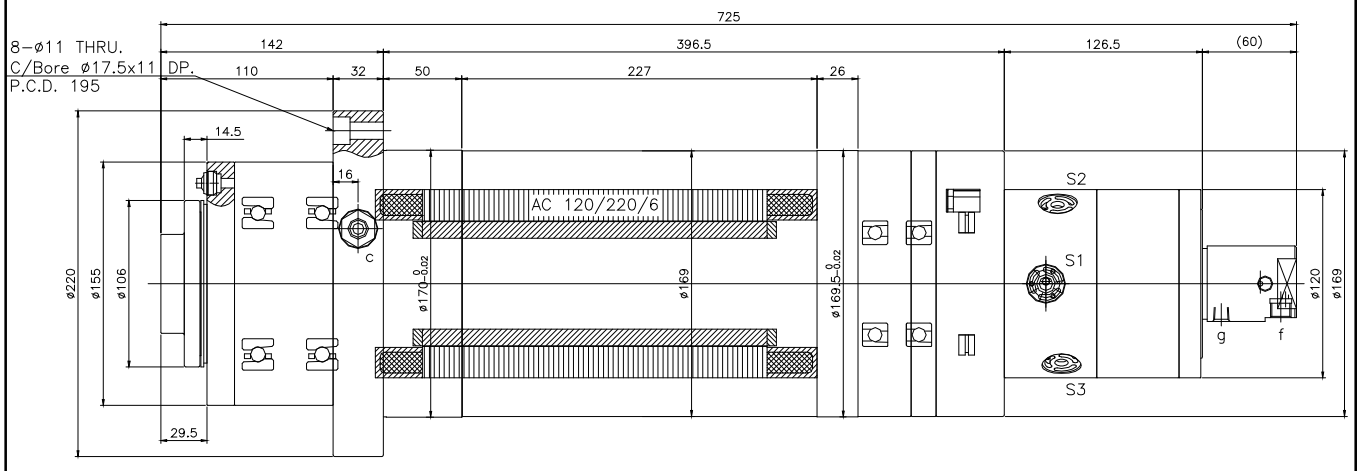

Edition 2016/08/01