


DUAL AXIS SERVO ROTARY HEADS (Orthogonal Type)

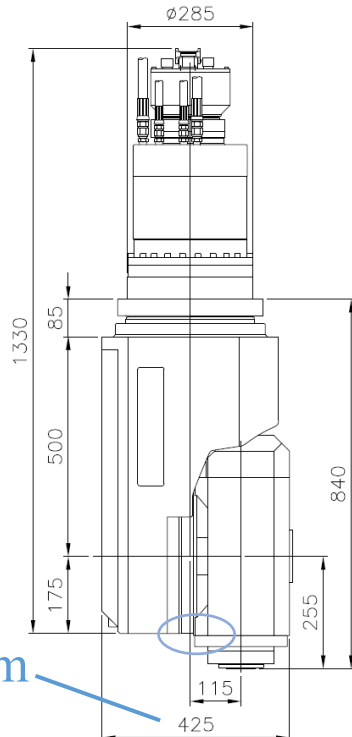

18000rpm/88Nm/37kW max.

Tool Interface	HSK A63
Max. Spindle Speed	18000 rpm
Spindle Power	29.5kW S1 Cont. /37kW S6 ts=2min
Spindle Torque	70Nm S1 Cont./88Nm S6 ts=2min
Spindle Lubrication	Oil air
A/C / Max. Torque	A:525 Nm/ C:318 Nm
A/C / Clamping Torque	1900 Nm
A/C / Rotary Angle	C : $\pm 240^\circ$ / A : $\pm 110^\circ$
Measuring System	Absolute
Accuracy of Graduation	C : $\pm 2.5''$ / A : $\pm 1.9''$
Function	CTS
Volume L×W×H	425 × 350 × 1330 mm
Total Weight	550 kg

Edition 2021/02/05