




Motorized Spindle New Product

Spindle Model :
231A620

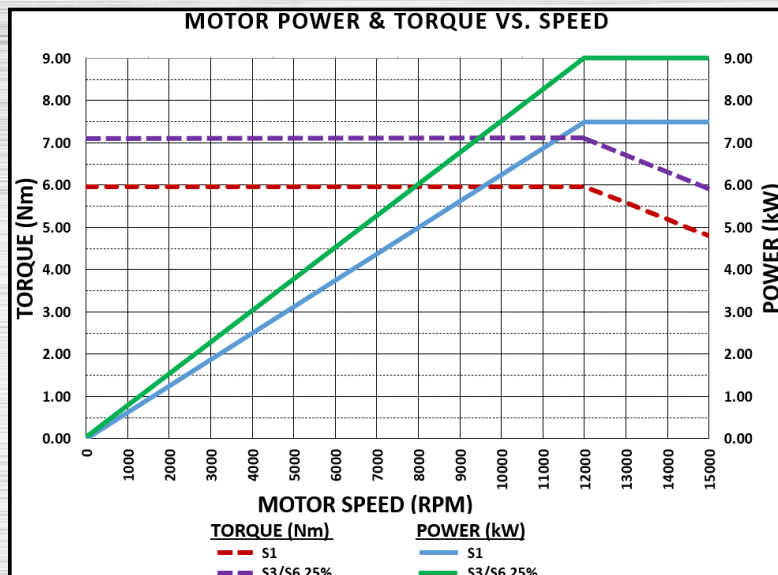

Tool Interface	HSK E40
Spindle Max. Speed grease	15,000 rpm / Optional 24,000 rpm
Motor Power (220v)	7.5 kW S1 cont. / 9.0 kW S3/S6 25%
Motor Torque	6.0 Nm S1 cont. / 7.2 Nm S3/S6 25%
Bearing I.D.	ø45 mm
Bearing lubrication	Grease
Pull-in force	6.8 kN
Release pressure	Hydraulic - 45-50bar
Cooling system	Water with additive
Rotary union	C.T.S. Ready / 70bar max.
Encoder	Fanuc A860-2150-T211
Slide feed travel	120 mm
Spindle and Slide Weight	47 kgf



2255 Global Way
Hebron, KY 41048
+1-877-454-3087
www.setco.com

